

MAT20PD COIN OR CARD TOP-LOAD WASHER

MAYTAG
COMMERCIAL



DEEP-WATER WASH SYSTEM

- Provides optimal wash performance with deep-water wash and rinse cycle options and vigorous cleaning action.
- Traditional flex-vane agitator provides four distinct wash profiles—from aggressive to gentle—designed to pull clothes from the top to the bottom of the wash basket.
- PowerWash® cycle provides more agitation, hotter water, and an extra rinse for the dirtiest loads.



CARD READER COMPITABLE

- Order your new washer as Card Only to prevent vandalism and increase safety on site.
- Card Reader accepts Visa, Mastercard, Paywave, Paypass, Apple Pay and Android Pay.



POWERFUL DRIVE SYSTEM

- Enhanced design of the triple-lip seal and stainless-steel shaft, in addition to the premium bearings, delivers reliability and consistency.
- Powerful 1/2-HP PSC motor and quad-gear transmission create an efficient wash for every load.




HEAVY-DUTY CABINET

- Possesses the strength needed for high-demand commercial environments.
- Sturdy front panel, side panels, and easy-access base are all manufactured from high-grade, extra-strength galvanized steel.



REMOVABLE FRONT PANEL



PREMIUM PORCELAIN ENAMEL
TOP & LID



EASY-ACCESS STEEL BASE



Visit maytagcommerciallaundry.com

OUR COMMITMENT TO DEPENDABLE QUALITY

We understand what dependability means to your owners. That's why we use sturdy components and engineer our products to withstand tough commercial laundry environments for years. Our machines deliver consistent results, powerfully cleaning loads of varying sizes with ease. And because we trust our machines to perform, we back them with exceptional warranties. That's what reliability means to Maytag.

MAYTAG® COMMERCIAL TOP-LOAD WASHER INTELLIGENT CONTROLS, COIN DROP-READY

WASHER SPECIFICATIONS	
MODEL	MAT20PDAGW
MOTOR SIZE—HP (KW)	1/2 (.37)
EXTRACT SPEED—MAX G-FORCE / MAX RPM	144/700
APPROXIMATE WATER USAGE—LITERS	
Average total water usage per cycle	62.8
Average hot water usage, warm water cycle	2.1
Average hot water usage, hot water cycle	26.6
CAPACITY	
Cylinder volume—liters	82
Cylinder diameter—mm	528
Cylinder depth—mm	605
DIMENSIONS	
Width—mm	686
Depth—mm	660
Height—mm	1,130
Lid opening—mm	432
CRATED DIMENSIONS	
Width—mm	737
Depth—mm	699
Height—mm	1,255
APPROXIMATE WEIGHT	
Uncrated—kg	72.1
Crated—kg	80.3
ELECTRICAL REQUIREMENTS	
Electrical rating—voltage/HZ	220-240/50
Breaker/Fuse—amps	10
WATER INLET / HOSE	
Operating pressure PSI (bar)	20-100 (1-8)
Inlet hose length—ft. (m)	6 (1.8)
Drain hose length—ft. (m)	4.2 (1.3)
WARRANTY	
5-Year Limited	

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.





5-YEAR LIMITED WARRANTY ALL PARTS COVERED

See maytagcommerciallaundry.com for complete warranty details.

Visit maytagcommerciallaundry.com

MAT20PD TOP-LOAD WASHER

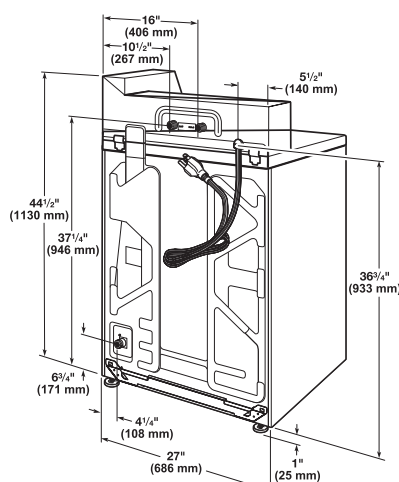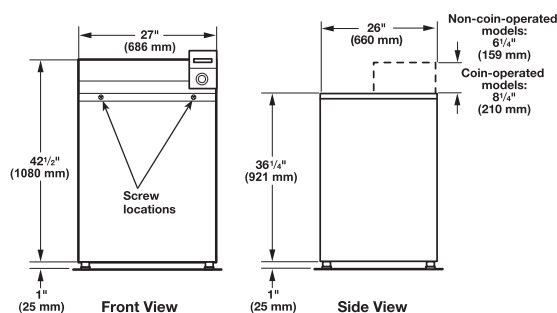

Back View